

TMA-1

Works with LCD-1B, LCD-1CB, LCD-2B, FP-SFTB and FP-SFB

INSTRUCTION MANUAL

Minimum Size: 20 x 13.5 cm (7.9" x 5.3")

Maximum Size: 27 x 19.6 cm (10.6" - 7.7")

Max Load: 2.7 kg (6 lbs)

Features: Able to hold most tablets 7" to 11"

Tablet Mount Adaptor (x1) Instruction Manual(x1) Hardware Kit (x1)

- 1** Read these instructions before you begin. If you are unsure of any part of the process, contact a professional contractor or installer for assistance. Improper installation can result in injury or damage.
- 2** Safety gear and proper tools must be used. Failure to do so can result in injury or damage.
- 3** Follow all instructions and recommendations regarding adequate ventilation and suitable locations for mounting your tablet. Consult the owner's manual for your particular tablet for more information.

CAUTION: This tablet mount adaptor is intended for use only with the maximum weight of 2.7 kg (6 lbs). Use with heavier than the maximum weights indicated may result in instability causing possible injury.

Phillips Head Screw Driver

(A) M6 x 20 Screw (x4)



For more information, contact us at: 877.281.2169

VMP
VIDEO MOUNT PRODUCTS

Part 1 - Mounting to the mounts

IMPORTANT! For safety reasons, this tablet mount adaptor must be secured to a mount capable of supporting the combined weight of the mount and tablet.

- 1 Attach the tablet mount adaptor to the VESA 100 x 100 mount by M6 x20 screws (A) as shown (see Fig. 1). Do not over-tighten these screws

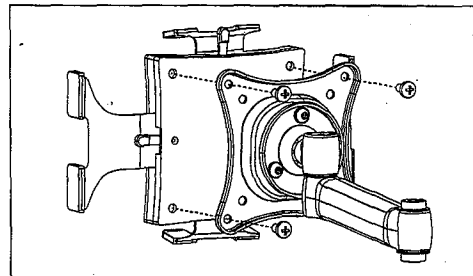


Fig. 1

Part 2 - Final Assembly

IMPORTANT! Use extra care during this part of the installation. ***NOTE*:** The Lock/Release levers on the TMA-1 have 3 positions that control the ability to adjust the opening and closing width of the arms. The left and right positions are locking positions and the middle position is Unlocked/Neutral. Please make sure to have the lever in the Unlocked/Neutral position before attempting to adjust the arms of the adaptor to keep from damaging the unit. Once your tablet is loaded and the adjustable arms are tight against the sides of the tablet, please move the lever either to the right or left locked position to firmly secure the tablet in place.

- 1 Open the tablet mount adaptor, make sure you can load your tablet in the adaptor easily. (see Fig. 2).

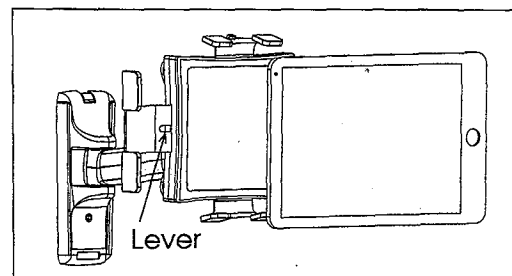


Fig. 2

- 2 Load your tablet in and adjust the tablet mount adaptor size according to your tablet size, make sure the tablet is stable and safe in the tablet adaptor (see Fig. 3). Do not release the tablet until the tablet is securely placed in the tablet adaptor and the lock /release lever is in the locked position.

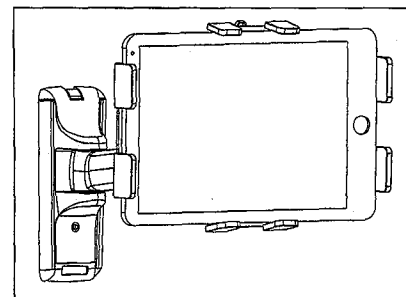


Fig. 3

- 3 Periodically clean your tablet with a dry cloth. Inspect all screws and hardware at regular intervals to ensure that no connections have become loose over time. Re-tighten as needed.