


# **WMP**

VIDEO MOUNT PRODUCTS

Instruction Sheet For:

## **LCD-MID-FT & LCD-MID-FTB**

---

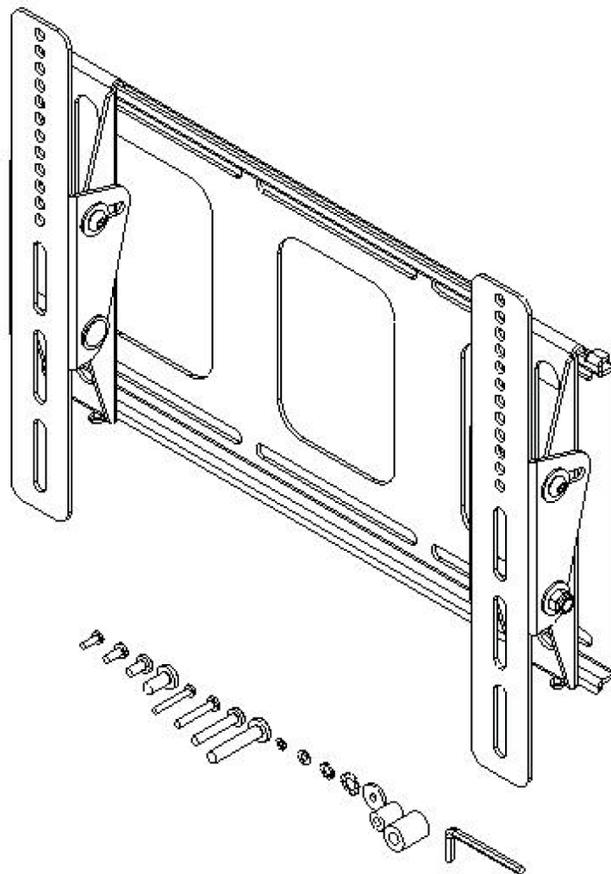



---

For more information, please contact us at:  
345 Log Canoe Circle, Stevensville, Maryland 21666  
Toll Free: 877.281.2169 Phone: 410.643.6390 Fax: 410.643.6615  
[www.videomount.com](http://www.videomount.com)

# LCD-MID-FT

ITEM NO.	DESCRIPTION	QTY.
1	Wall Plate	1
2	Pivot Bracket	2
3	Screen Mount Bracket	2
4	Socket Screw M8*P1.25*L20	4
5	Carriage Screw 5/16" - 18UNC*L2.75"	2
6	Washer $\phi 12 * \phi 19 * T1.6$	2
7	Nylon Nut 5/16" - 18UNC	2
8	Washer $\phi 9.2 * \phi 25 * T1.6$	6
9	Cross Screw M3*P0.7*L12	2
10	M5 Allen Key	1
11	Cross Screw M4*P0.7*L12	4
12	Cross Screw M5*P0.8*L12	4
13	Cross Screw M6*P1.0*L12	4
14	Cross Screw M8*P1.25*L16.5	4
15	Cross Screw M4*P0.7*L30	4
16	Cross Screw M5*P0.8*L30	4
17	Cross Screw M6*P1.0*L35	4
18	Cross Screw M8*P1.25*L40	4
19	Lock Washer M4	4
20	Lock Washer M5	4
21	Lock Washer M6	4
22	Lock Washer M8	4
23	Washer $\phi 5.5 * \phi 18 * T2.0$	4
24	Spacer M6	4
25	Spacer M8	4
26	Magnetic Level	1
27	Lag Screw 5/16"*L2.5"	4
28	Washer $\phi 8.3 * \phi 19 * T1.6$	4

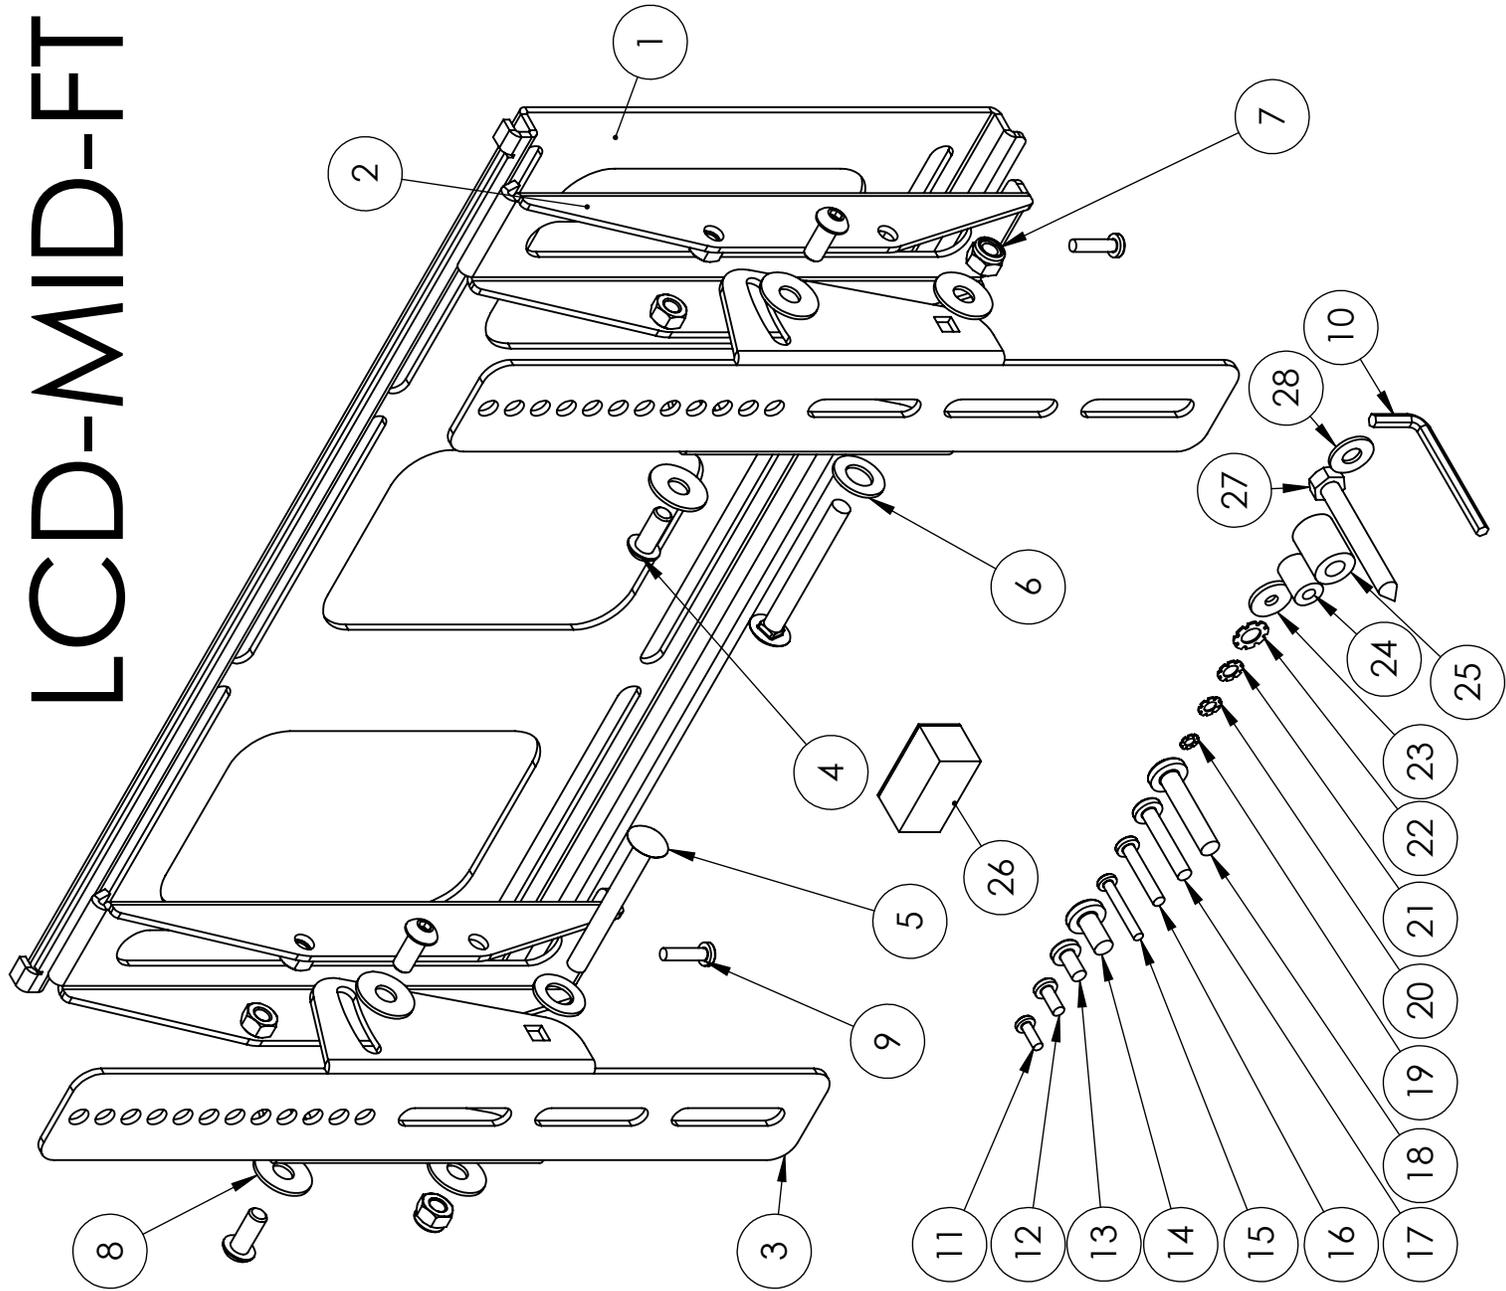

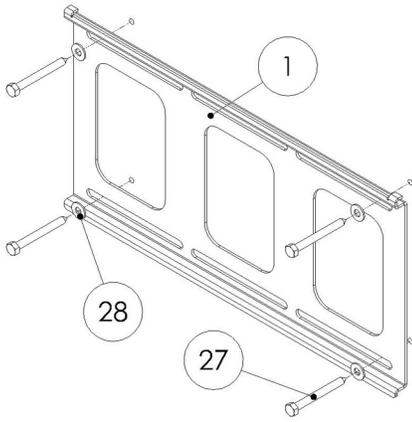

Step 2: Mounting the wall plate

### Step 1

Before starting, lay out all parts to your mount and match them to the parts list provided. Verify that you have all your parts before attempting to assemble the mount.


### Step 2

Mark the wall or desired mounting surface in preparation of installation of wall mounting plate (1). If mounting to wooden studs, pre drill pilot holes using a 7/32" drill bit. Attach the wall plate (1) to the wooden stud using the 5/16" by 2.5" long lag screw (27) and washer (28) making sure the small ear flaps are on the top rail of the wall plate (1).


**WARNING: Please verify that your mounting surface will support the combined weight of your mount, mounting hardware, and flat panel. Also verify that the mounting surface is safe to drill through. Please note only mounting hardware for mounting to wooden studs will be provided with the unit. If mounting to a surface other than wooden studs then other hardware will be required. If in doubt or uncertain about any of the above, please contact a professional installer.**

### Step 3


Determine the correct screw size and if you need to use washers, lock washers, or spacers. **Note: Spacers are used for TVs with recessed hole patterns.** Secure the display to the screen mount bracket (3) using the appropriate hardware (11) through (25). **Note: The brackets have to be level with each other to work properly.**

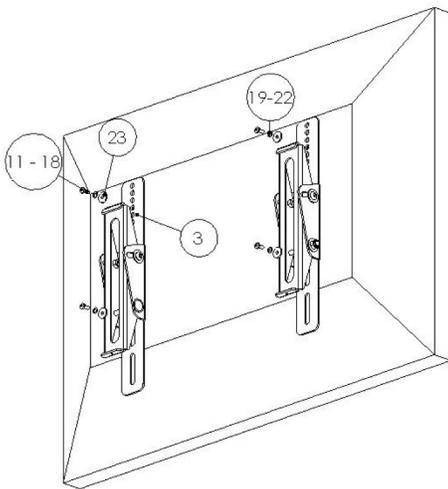


Step 3A: Attaching the mounting brackets to the screen (spacers not needed)

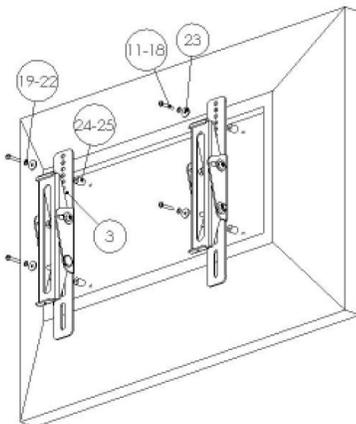


Step 3B: Attaching the mounting brackets to the screen (spacers used due to recessed hole patterns)

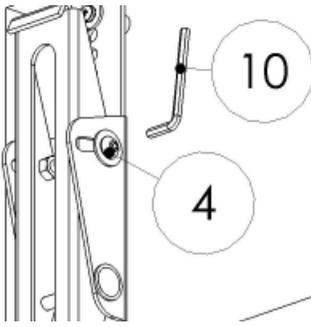

Step 4: Adjusting the tilt tension before placing the screen on the wall

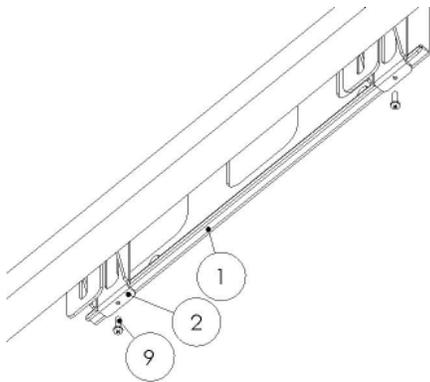

Step 5: Securing the pivot brackets to the wall plate

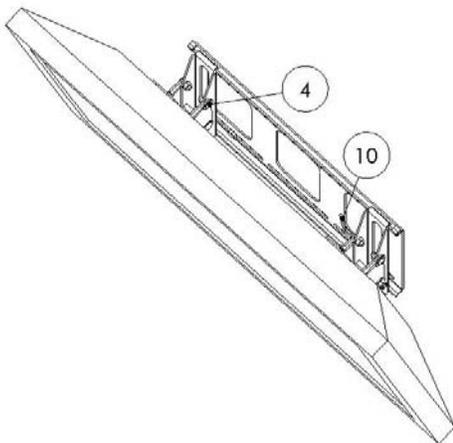

Step 6: Adjusting the tilt tension after placing the screen on the wall

#### Step 4

Adjust the tilt tension by tightening the socket head screws (4) with the M5 Allen Key (10) so they are fairly tight. **Note: You may have to adjust the tilt tension once the flat screen is on the wall so do not tighten as hard as you can because it will make further adjustment on the wall much more difficult.**

#### Step 5

Use the hooks on the pivot bracket (2) to hook on the top rail of the wall plate (1). Use the M5 screws (9) to secure the TV to the wall plate (1) and to secure its horizontal position.

#### Step 6

**If you need to adjust the tilt tension:**

Tilt down the flat screen as far as it will go. **Note: This is done to give you room to work with behind the flat screen.** Take the M5 Allen Key (10) and tighten down the socket screws (4) until you have achieved the desired tilt tension and readjust the tilt to the desired angle.

**Please verify that all nuts and screws are securely tightened.**

## Enjoy Your Mount!

**WARNING:** The installer of these products must verify that the mounting surface, ceiling or wall, will safely support the combined weight of all attached equipment and hardware. Video Mount Products will not be held liable for the improper use or installation of its products.

**VMP**  
VIDEO MOUNT PRODUCTS